




DAMPBLOCK

Waterproofing Emulsion

PRODUCT DESCRIPTION

AGH Damp Block Premium Acrylic emulsion is a premium quality, durable, water based elastomeric emulsion with acrylic fibers. It provides thick and durable waterproofing coating.

PERFORMANCE FEATURES

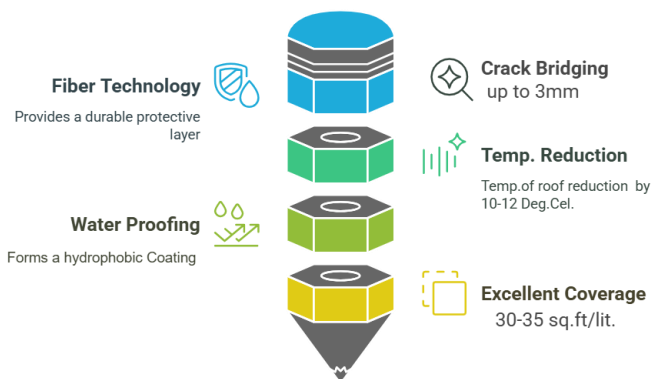

SURFACE PREPARATION

- 1 Ensure the surface is clean, dry and free from all defective or poorly adhering material, dirt, grease, wax, etc.
- 2 Remove all loose or poorly adhering material by rubbing down using suitable abrasive paper and there after wipe off. Wash out the area with water.
- 3 Treat fungus affected area using Fungicidal Solution. Allow to react for 6-8 hrs.
- 4 Apply a self primed coat of Dampblock emulsion to the clean surface.
- 5 Then apply two coats of Dampblock paint with no thinning.

DIRECTION OF USE:

- New plasters should be allowed to dry for minimum of 30 days
- Surfaces should be clean from dust, grease and loose paints before coating.
- If required use Jet spray machine or vacuum cleaners to clean surface thoroughly.
- Fill cracks upto 3 mm by any best Crack Seal in market. Fill bigger cracks with cement mortars.
- Do not apply Coatings during rains or high temperatures.
- Apply coatings on parapet walls also for better results.

APPLICATION AREA



Exterior walls



Building Roofs



Terrace

APPLICATION PROCESS:

Vertical/Horizontal Walls

- Apply 1st coat of AGH DampBlock diluted with 30-35% water as a self-priming coat.
- Apply 2nd coat of AGH DampBlock without dilution after a 2-3 hrs. of priming coat.
- Apply 3rd coat of AGH DampBlock without dilution after 4 hrs. of 2nd coat.
- The 2nd and 3rd coat application must be in crisscross manner.
- If repainting -No need to apply priming coat.

POST APPLICATION INSTRUCTIONS

Surfaces painted with AGH DAMPBLOCK are washable with water weeks if required.

SAFETY FEATURES



Non- Flammable.

PACK SIZES



1 lit.4 lit., 10 lit. and 20 lit.

SHADE RANGE



WHITE ONLY

- Refer PDS for 'AGH DAMPBLOCK for safety measures and precautions.
- Store in well ambient conditions ,ventilated locations and away from sources of ignition and fire.
- Keep away from children.
- In case of eye/ skin contact, wash with plenty of water.
- Inhalation / Injection will cause danger. In case move to fresh air & consult medical practitioners in both the cases.
- Do not apply when ambient temperature might drop to level below 10°C within 4 Hrs. of application.
- New plaster should be allowed to cure for minimum 12 weeks.
- Avoid extra thinning for better results.
- The container must be tightly closed when not in use. Stir well and strain before use.
- Use safety equipment's like rubber or polythene gloves, safety goggles / glasses and face mask.

