




FELIX

PREMIUM ACRYLIC DISTEMPER

PRODUCT DESCRIPTION

AGH FELIX Premium Acrylic Distemper is a premium quality, durable, water based interior wall finish. It can be applied on ceilings and walls where a beautifying matt finish, free from irritating glares due to light reflection is desired.

PERFORMANCE FEATURES

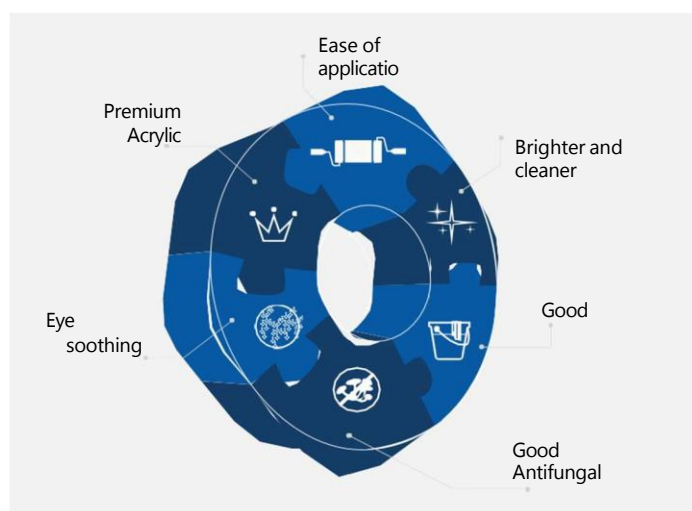

SURFACE PREPARATION


- 1 Ensure the surface is clean, dry and free from all defective or poorly adhering material, dirt, grease, wax, etc.
- 2 Remove all loose or poorly adhering material by rubbing down using suitable abrasive paper and then wipe off.
- 3 Treat fungus affected area using Fungicidal Solution. Allow to react for 6-8 hrs.
- 4 Apply a coat of suitable Primer* followed by acrylic wall putty to level the dents and make surface uniform. Apply again a coat of suitable Primer*.
- 5 Then apply two coats of FELIX Acrylic Distemper.

RECOMMENDED USAGE

AGH FELIX Premium Acrylic Distemper is recommended for interior use only. It can be applied on fully matured plaster work, concrete, brickwork and asbestos surfaces where a matt finish, free from irritating glares due to light reflection is desired.

RECOMMENDED SYSTEM FOR APPLICATION

For New Masonry Surfaces

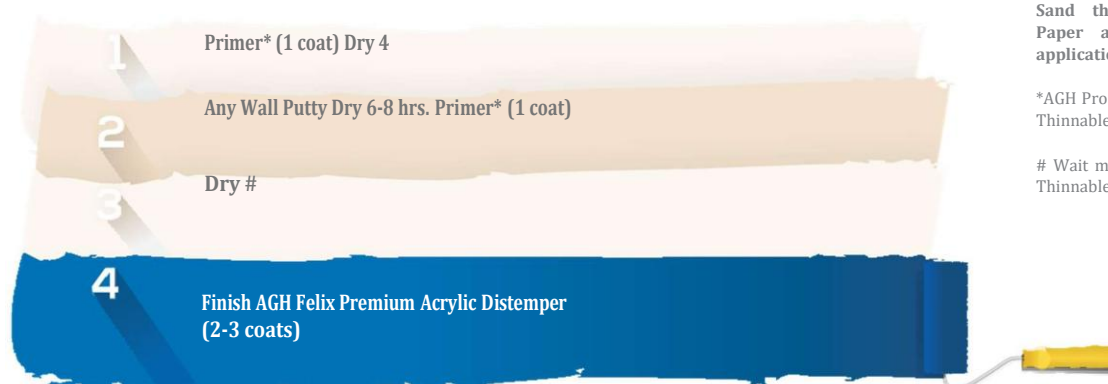

Sand the surface with Emery Paper and wipe clean before application on subsequent coats.

*AGH Procoat Interior Primer (Water Thinnable) application

Wait minimum 4-6 Hrs for Water Thinnable Primer.

FOR REPAINTING ON SMOOTH LIME/DISTEMPER/ EMULSION / ENAMEL MASONRY SURFACES SKIP STEPS 2 AND 3.

TECHNICAL DATA

 COVERAGE *** 180 - 200 sq.ft/kg/coat, when applied on smooth and non-absorbent surface.		GLOSS LEVELS/ SHEEN LEVELS Matt 
 DRYING TIME Surface Dry: 30 minutes.		THINNING 1:1 Water to Distemper. 
 RECOATING Min 4-6 Hrs. @27° ± 2°C & RH 60 ± 5%		FLASH POINT NA 
 STABILITY OF THINNED PAINT Use within 24 Hrs.		

**Actual coverage may vary depending on method, condition of application, surface roughness & shade.

PRECAUTIONS



- Refer PDS for 'AGH FELIX Premium Acrylic Distemper for safety measures and precautions.
- Store in well ambient conditions, ventilated locations and away from sources of ignition and fire.
- Keep away from children.
- In case of eye/ skin contact, wash with plenty of water.
- Inhalation / Injection will cause danger. In case move to fresh air & consult medical practitioners in both the cases.
- Do not apply when ambient temperature might drop to level below 10°C within 4 Hrs. of application.
- New plaster should be allowed to cure for minimum 12 weeks.
- Avoid extra thinning for better results.
- Can be tinted with 'Any best Universal Stainer before thinning. Stir the tinted paint well, after tinting & before application.
- The container must be tightly closed when not in use. Stir well and strain before use.
- Use safety equipment's like rubber or polythene gloves, safety goggles / glasses and face mask.

POST APPLICATION INSTRUCTIONS

Surfaces painted with AGH FELIX DISTEMPER are washable by sponging with mild soap and water after a min. of 2 weeks drying to remove ordinary stains and everyday dirt.

PACK SIZES

1 kg, 2 kgs, 5 kgs, 10 kgs and 20 kgs.

SAFETY FEATURES

Non- Flammable.

SHADE RANGE

800 +SHADES AVAILABLE